





Hytera P30 is a push-to-talk over cellular (PoC) radio providing instant voice communications over the 2G, 3G or LTE network for those engaging in security, property management, utilities, logistics, and more.

The radio promotes efficient collaboration in daily works from low latency to always-stable signal, from multiple standby groups to quick group creation. Plus, the radio focuses on user experience in terms of professional design and all-day battery.



Give you ultimate experience from the 22 mm thinness to 170 g weight, from texture to housing, and even to keys.







Application Scenarios













Specifications

Europe, Asia and Africa GSM: 850/900/1800/1900 WCDMA: B1/B5/B8

LTE TDD: B34/B38/B39/B40/B41

LTE-FDD: B1/B3/B5/B7/B8/B20/B26/B28

Frequency Range Americas:

GSM:850/900/1800/1900 WCDMA:B2/B4/B5 LTE TDD:B38/B41/B40

LTE-FDD:B2/B3/B4/B5/B7/B12/B13/B17/B26/B28

System	RTOS
Dimensions (H x W x D)	118 mm × 55 mm × 22 mm
Weight	170 g (without belt clip)
Screen	1.77 inches, 128 x 160
SIM Card Slot	Nano x 1
Location	Optional
	GPS+BDS, GPS+GLONASS, BDS
BT	BT 2.0
NFC	Optional
Interface	USB Type-C port
	3.5 mm audio jack
Battery Capacity	3,300 mAh
Charging	USB Type-C port
Speaker	2 W (rated.); 3 W (max.)
Operating Temperature	-10°C to +55°C
Storage Temperature	-30°C to +70°C
ESD	±12 kV (air); ±8 kV (contact)
IP Rating	IP54
Drop Resistance	1.2 m

Accessories • Standard • Optional







Battery



Adapter



Data Cable






Belt Clip Wired Earpiece



30 years of radio communications, beyond.

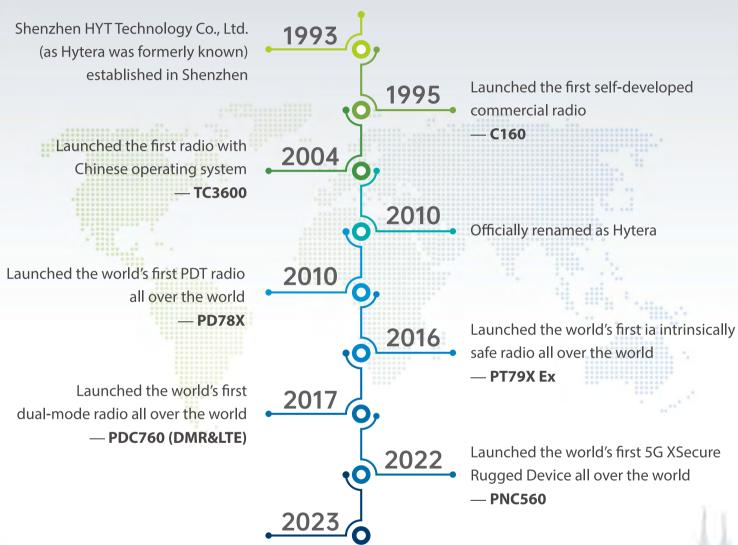

Hytera serves 20 million users for public safety, firefighting, railway, airports, factories, hotels, supermarkets, and more industries home and abroad.



Hytera Communications Corporation Limited Stock Code: 002583.SZ

Address: Hytera Tower, Hi-Tech Industrial Park North, 9108# Beihuan Road, Nanshan District, Shenzhen, P.R.C

Tel: +86-755-2697 2999 Fax: +86-755-8613 7139 Post: 518057 Https://www.hytera.com marketing@hytera.com









Hytera closen't bear relevant responsibility. Little difference between real product and product indicated by printing materials will occur by printing reason.